


API Delevan[®]

Robust Construction.
Reliable Performance in Critical Environments.

Wirewound Surface Mount Inductor (0402)

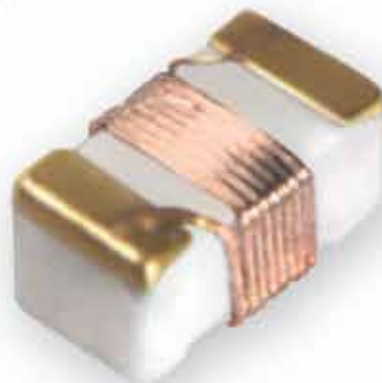

- High-Temperature Ceramic Cores and Magnet Wire providing temperature stability
- Optional water dissolvable top cap for automated pick & place systems
- Inductance values up to 68.0 μH
- Inductance tolerances down to +/-1%
- Low AC & DC Resistance
- High Q factors and Ultra High SRF values
- Operating Temperature Range: -55°C to +125°C
- Higher Operating Temperatures to +175°C available